


2003 GMC 5500 w/Chrome Trim Ring

42011 42012 42013

For installation of billet grilles that require cutting of the stock shell, proper tools, knowledge and skill are needed. Carriage Works is not responsible for care & accuracy of the installation, only for Fit & Finish of its products. Use a qualified installer or contact original vendor for references to complete all instructions.



1. Center billet grille in opening. Use toggle bolt assemblies supplied and attach per illustration below.
2. Check to make sure the grille is properly in place and tighten the bolts just enough to hold the grille in place. **DO NOT OVERTIGHTEN** as this may cause the grille to crack.

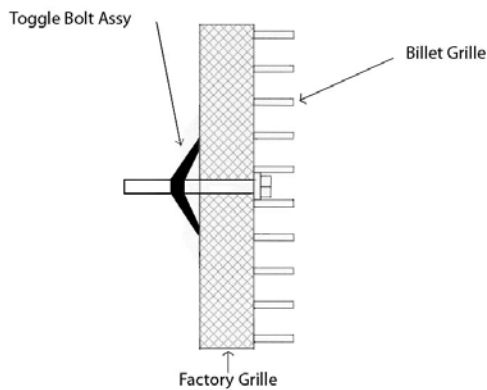

Note: Please adjust horizontal blades if irregular. This is the result of shipping and handling outside of Carriage Works control.