



2003-05 Chevy SS Truck Bolt Over

PART # 4 2 0 3 1 - 4 2 0 3 2 - 4 2 0 3 3



For installation of billet grilles that require cutting of the stock shell, proper tools, knowledge and skill are needed. Carriage Works is not responsible for care & accuracy of the installation, only for Fit & Finish of its products. Use a qualified installer or contact original vendor for references to complete all instructions.

Hardware


8 - Toggle Bolts



STEP 1 Center Billet Grille in opening. Use supplied toggle bolts and attach per illustrations below. For added appearance, paint the X-Hatch material black before attaching the billet grille.

STEP 2 Check to make sure the grille is properly in position. It may be necessary to slightly pull down on the center before tightening. (See picture above.)

STEP 3 Next attach the bottom Billet Grille section, similar to step 2, by centering the billet grille in opening and tightening in position using the supplied toggle bolts.

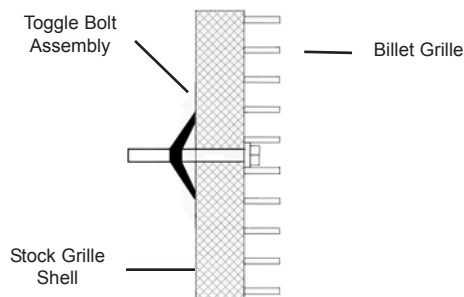

REF-- ILLUSTRATION FOR BILLET
GRILLE INSTALLATION.

NOTE: Please adjust horizontal blades if irregular. This is the result of shipping and handling outside of Carriage Work's control.

Also Carriage Works Inc. recommends applying a high quality automotive wax to maintain the original appearance.